



CUSTOM FABRICATED RESINOUS FLOORING PROLINE DRAIN BODY TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

DESCRIPTION

- Suitable for epoxy, urethane and sheet vinyl flooring.
- Total height from waterproofing to the finished floor, same as top of frame and strainer is 3/16".
- 18 Gauge 316L Stainless Steel.
- Drain body can be any size from 10" to 100".
- Internally pitched channel drain body. No water will be sitting in trough after each use.
- 34" maximum horizontal distance for pitched channel. (from edge of trough to center of waste outlet)
- Channel can be flat for longer runs or multiple waste outlets.
- 2" I.D. schedule 10 steel down spout waste outlet.
- Waste outlets can be placed at virtually any location.

CODES/STANDARDS APPLICABLE

- 2006 IPC
- 2009 IPC
- 2007 IAPMO/UPC
- ASME A112.18.2-2005
- CSA B125.2-2005
- ASME A112.6.


INSTALLATION NOTES

- Install product according to the Typical Praline Drain installation details.
- Drain body cannot be cut to size or modified.
- When used at the entry to a curbless shower as a primary shower drain, the capacity of the drain is 5g.p.m. and WAVES is the only recommended strainer pattern.
- QuickDrain recommends the strainer extend the entire length of shower pan. (wall to wall or wall to curb)


REQUIRED PARTS

- Strainer

PROLINE RESINOUS DRAIN ASSEMBLY

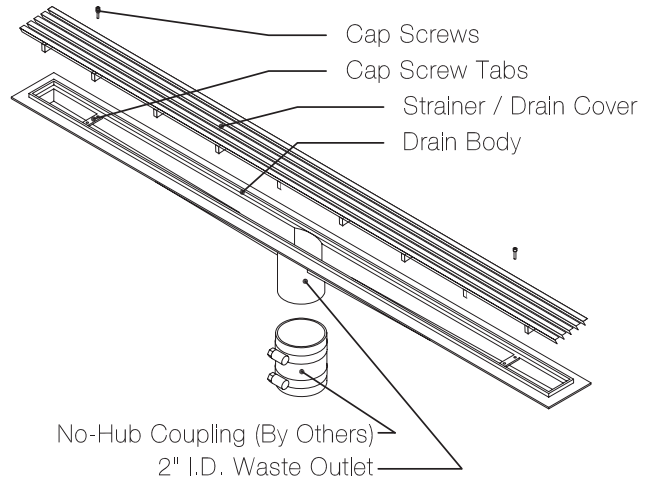

PROLINE RESINOUS DRAIN INSTALLATION DETAIL

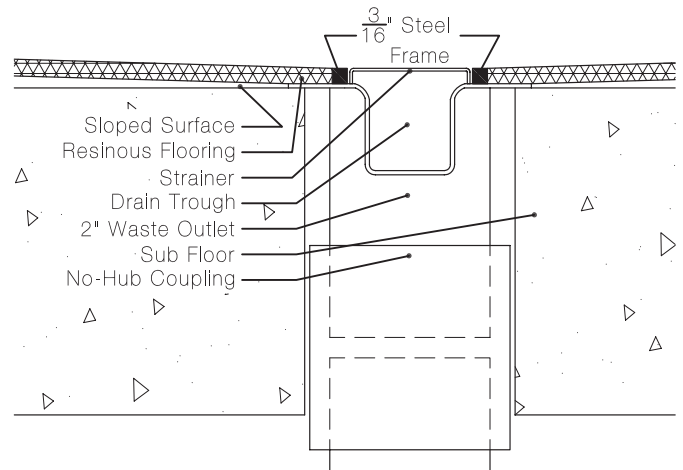

PROLINE RESINOUS DRAIN BODY DIMENSIONS

